


## Product Bulletin

**TO:** All Valued Beck/Arnley Customers  
**FROM:** Product Management  
**DATE:** July 2, 2010  
**SUBJECT:** Brake Caliper Mounting Guide


2010-07-CSB-AL

In some instances, the OEM will change the mounting of a brake caliper so it can be used for different applications.

Front Mount Caliper

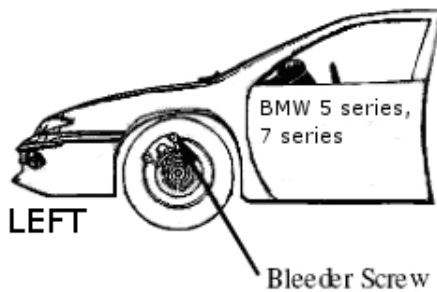

Rear Mount Caliper

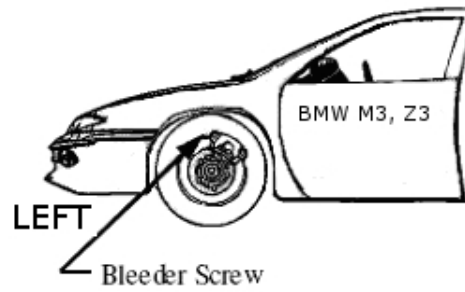

This changes the brake caliper from Left to a Right or vice versa depending on the application. This can be seen in the catalog:

**077-0813S**

BMW 740iL	1993	FRONT LEFT
BMW 735iL	92-88	FRONT LEFT
BMW 540i	95-94	FRONT LEFT
BMW M5	93-91	FRONT LEFT
BMW Z3	02-01	FRONT RIGHT
BMW M3	99-95	FRONT RIGHT



**077-0814S**

BMW 740iL	1993	FRONT RIGHT
BMW 735iL	92-88	FRONT RIGHT
BMW 540i	95-94	FRONT RIGHT
BMW M5	93-91	FRONT RIGHT
BMW Z3	02-01	FRONT LEFT
BMW M3	99-95	FRONT LEFT



Beck/Arnley includes a "Q" on the box to denote whether the caliper is primarily a front mount or rear mount and is boxed based on the more common application.

The peg of the "Q" represents the position of the bleeder screw with the caliper lying with the pad cradle up, as pictured below.



For applications like the BMW M3 and Z3 that have mounting opposite of the 5 series and 7 series using the same caliper, the Left becomes and Right and vice versa.

When purchasing calipers, be sure to match the caliper to the application.